


PRODUCT DESCRIPTION	
Color Index	Pigment Red 122
C.I. No.	73915
Chemical Type	Quinacridone



PRODUCT PROFILE
<p>HEUCOPLAST EZ Red 312201 is a high strength pigment dispersion in a polyolefin carrier. It has excellent pigment dispersion and is especially recommended for colouration of PE and PP.</p> <p>The free flowing, non-dusting nature of this product is suitable for automated feeding equipment.</p> <p>HEUCOPLAST EZ Red 312201 has excellent heat and light fastness and is suitable for all commodity plastics.</p>

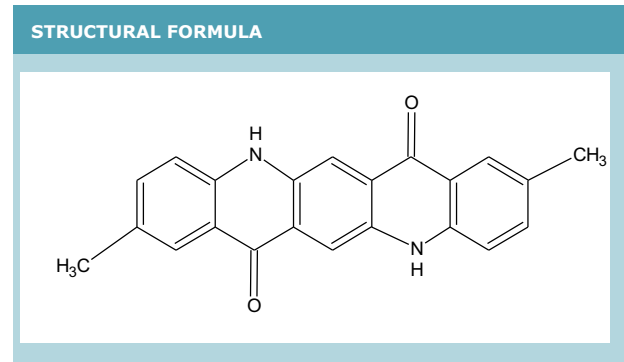

PHYSICAL DATA		
Appearance	Red Powder	
Density [g/cm <sup>3</sup> ]	1.09	DIN EN ISO 787-10
Bulk Volume [ltr/kg]	1.42	DIN 53194
Specific Surface [m <sup>2</sup> /g]	U.T.	DIN EN ISO 66132

APPLICATION PROFILE	
PE	recommended
PP	Potential use
PP Fibre	-
PVC-u	recommended
PVC-p	recommended
Rubber	recommended

FASTNESS PROPERTIES		
Migration	5	DIN EN ISO 14469-4
Light Fastness	8	DIN EN ISO 105-B01
Heat Resistance [°C]	280	DIN EN ISO 12877-2

STANDARD PACKAGING
-25kg PE Bags
- Different types of packaging are available on request

® = Registered trademark of Heubach Colour Pvt. Ltd. Our product specifications and application information are based on our current knowledge. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and us.