



PRODUCT DESCRIPTION		
Color Index	Pigment Red 254	
C.I. No.	56110,	
Chemical Type	Diketopyrrolo-Pyrrole	
CAS No.	84632-65-5	
Hue Angle [1/3 SD]	18.0	DIN EN ISO 53235

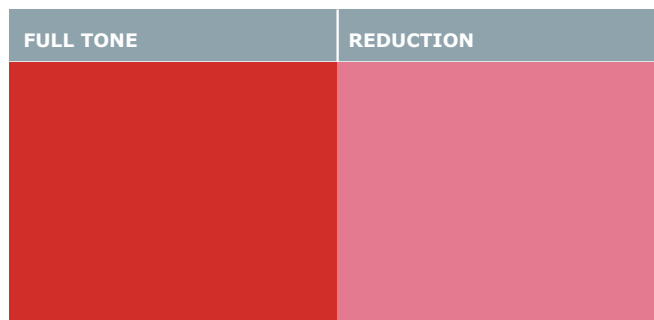

PHYSICAL DATA		
Appearance	Red powder	
Density [g/cm <sup>3</sup> ]	1.7	DIN EN ISO 787-10
Bulk Volume [ltr/kg]	5.3	DIN 53194
Specific Surface [m <sup>2</sup> /g]	34	DIN EN ISO 66132

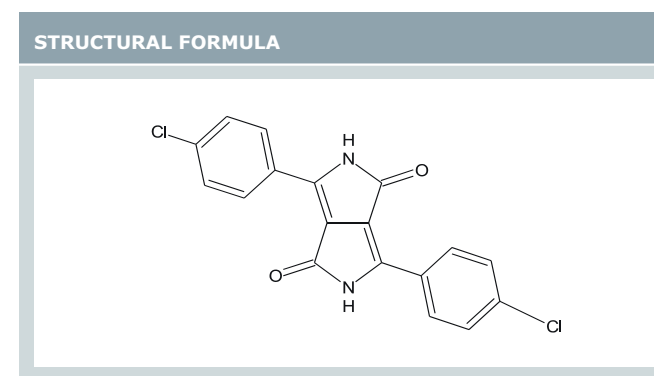

FASTNESS PROPERTIES		
Acid	5	DIN EN ISO 787-14
Alkali	3-4	DIN EN ISO 787-14
Migration	5	DIN EN ISO 14469-4
Light Fastness	U/T	DIN EN ISO 105-B01
Heat Resistance [°C]	260	DIN EN ISO 12877-2
Warping in HDPE	High	DIN EN ISO 294-4

APPLICATION PROFILE	
PE	recommended
PP	recommended
PP fibre	potential use
PVC-u	recommended
PVC-p	recommended
PS	potential use
ABS	potential use
PA	-
PC	-
Rubber	recommended

® = Registered trademark of Heubach Colour Pvt. Ltd. Our product specifications and application information are based on our current knowledge. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and us.