



PRODUCT DESCRIPTION		
Color Index	Pigment Yellow 139	
C.I. No.	56298	
Chemical Type	Isoindoline	
CAS No.	36888-99-0	
Hue Angle [1/3 SD]	74.0	DIN EN ISO 53235

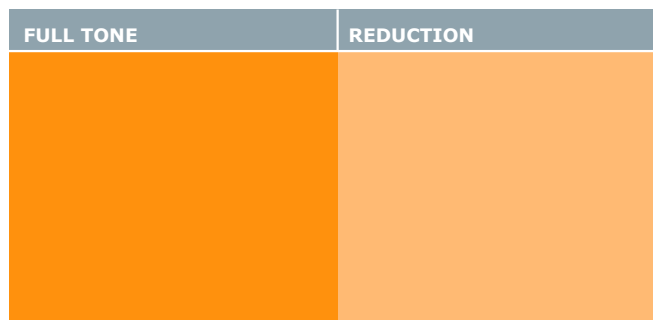

PHYSICAL DATA		
Appearance	Yellow Powder	
Density [g/cm ³]	1.6	DIN EN ISO 787-10
Bulk Volume [ltr/kg]	7.7	DIN 53194
Specific Surface [m ² /g]	52	DIN EN ISO 66132

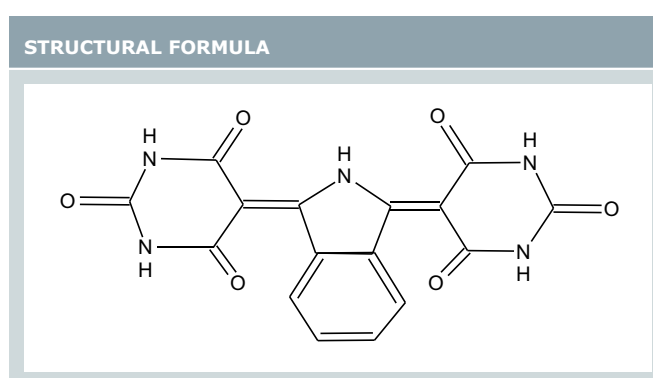

FASTNESS PROPERTIES		
Acid	5	DIN EN ISO 787-14
Alkali	3-4	DIN EN ISO 787-14
Migration	5	DIN EN ISO 14469-4
Light Fastness	7	DIN EN ISO 105-B01
Heat Resistance [°C]	240	DIN EN ISO 12877-2
Warping in HDPE	Low	DIN EN ISO 294-4

APPLICATION PROFILE	
PP Fiber	recommended
PET Fiber	-
Polyamide Fiber	-

REGULATIONS	
Germany BfR recom. IX	Compliant
AP 89/1	Compliant
USA (FDA) 21 CFR § 178.3297	Not Listed
Toys Europe EN 71-3:2013	n.a
Toys USA ASTM F 963-03	Compliant
CONEG, EC 94/62	Compliant
ROHS, 2002/95/E, 2005/618/EC	Compliant
End of Life Vehicles, 2000/53/EC, 2002/525/EC	Compliant

STANDARD PACKAGING
- 10kg Cardboard Boxes
- Different types of packaging are available on request

CHEMICAL INVENTORY LISTING STATUS
All ingredients are listed in the following national chemical inventories: EINECS [Europe], TSCA [USA], DSL [Canada], AICS [Australia], NZIoC [New Zealand], MITI [Japan], ECL [Korea], IECSC [China], PICCS [Philippines]

® = Registered trademark of Heubach Colour Pvt. Ltd. Our product specifications and application information are based on our current knowledge. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and us.